

VSP

Electric pumps with variable frequency driver



MADE IN ITALY

 **PEDROLLO**[®]
the spring of life


ECO
FRIENDLY



Electric pumps with variable frequency driver

- Clean water
- Domestic use
- Civic use
- Industrial use

● ELECTRIC PUMPS WITH BUILT-IN VARIABLE FREQUENCY DRIVER

Compact pumping units, complete with electric pump, variable frequency driver, and pressure sensor

● QUIET HIGH-PERFORMING OPERATION

VSP runs particularly quietly thanks to smooth starts and stops that eliminate water hammering while drastically reducing power consumption.

Electronic Power Factor Corrector (PFC) technology ensures compliance with the most stringent European regulations by always providing the maximum performance stated on the rating plate, regardless of any, even significant, deviation of the supply voltage from the rated value (+/- 20%).



INSTALLATION AND USE

Ideal for domestic and civic pressurization systems, the VSP pumping unit, thanks to its variable frequency driver speed regulator, allows modulating the motor speed according to the amount of water used by the system, reducing energy consumption and keeping the system pressure constant at all times, even when the number of points of delivery changes.

The incorporated speed regulator, powered by a single-phase or three-phase voltage, delivers a three-phase output voltage that powers a motor of efficiency class IE3.

PROTECTIONS

Dry running

Microchip action stops the pump after a few seconds and attempts scheduled restarts to check water availability.

Currents - voltages - temperatures

VSP limits currents, alerts if the voltage exceeds the allowed limits, and protects from overheating as well as short circuits between the output phases.

Dynamic sensor monitoring


Continuous monitoring of the state of the sensors in the system allows VSP to dynamically adjust the operation of the pump and, in the event of faults, shut down the pumping unit.

WARRANTY

2 years as per our general terms and conditions of sale

ENERGY SAVING


As it works at variable speed, VSP uses only the necessary energy demand required by the system according to the water demand.

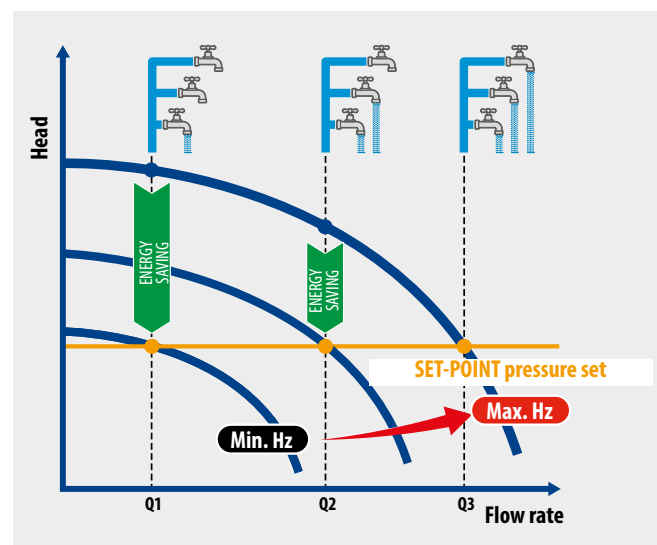

Variable frequency driver protection rating: IP 55

VSP-FCR

PERFORMANCE RANGE

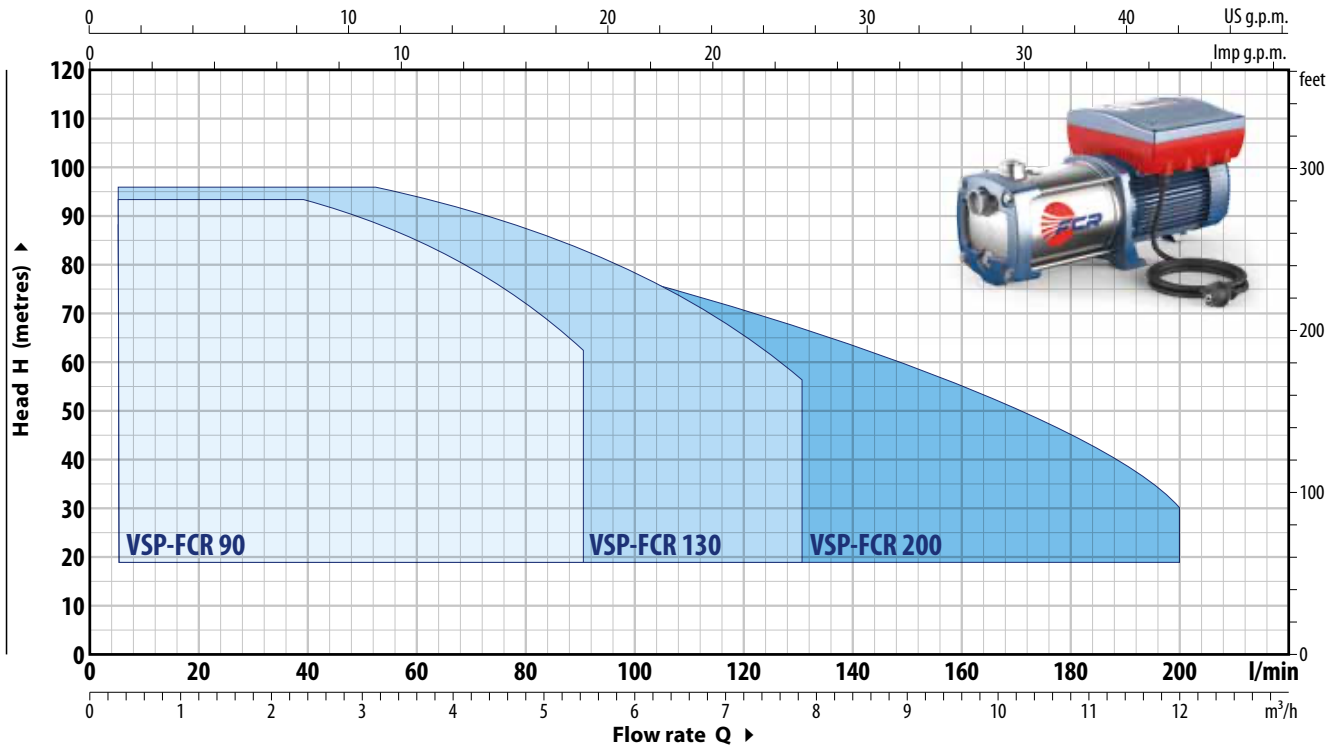

MODEL	POWER			ABSORPTION	MAX PERFORMANCE		PERFORMANCE (ADJUSTABLE SET POINT)					
	P2		▲		Q	H	Min. Set Point		Set Point Std. Setting		Max. Set Point	
SINGLE-PHASE	kW	HP		230 V			litres/min	metres	bar	l/min	bar	l/min
VSPm-FCR 75/90	1.5	2	IE3	9.8 A	5 – 90	73 – 44	1.9	5 – 56	4.0	5 – 86	7.0	5 – 16
VSPm-FCR 80/130	1.5	2		9.8 A	10 – 130	76 – 31	2.0	5 – 100	4.0	5 – 114	7.3	5 – 18
VSPm-FCR 70/200	1.5	2		9.8 A	20 – 200	67 – 14	1.8	5 – 194	4.0	5 – 152	6.4	5 – 48

MODEL	POWER			ABSORPTION	MAX PERFORMANCE		PERFORMANCE (ADJUSTABLE SET POINT)					
	P2		▲		Q	H	Min. Set Point		Set Point Std. Setting		Max. Set Point	
THREE-PHASE	kW	HP		400 V			litres/min	metres	bar	l/min	bar	l/min
VSP-FCR 75/90	1.5	2	IE3	3.6 A	5 – 90	73 – 44	1.9	5 – 56	4.0	5 – 86	7.0	5 – 16
VSP-FCR 100/90	2.2	3		4.9 A	5 – 90	100 – 63	2.5	5 – 54	4.0	5 – 69	9.2	5 – 40
VSP-FCR 80/130	1.5	2		3.6 A	10 – 130	76 – 31	2.0	5 – 100	4.0	5 – 114	7.3	5 – 18
VSP-FCR 105/130	2.2	3		4.9 A	10 – 130	104 – 58	2.7	5 – 85	4.0	5 – 105	9.6	5 – 46
VSP-FCR 70/200	1.5	2		3.6 A	20 – 200	67 – 14	1.8	5 – 194	4.0	5 – 152	6.4	5 – 48
VSP-FCR 95/200	2.2	3		4.9 A	20 – 200	93 – 30	2.4	5 – 175	4.0	5 – 185	8.6	5 – 56







▲ Three-phase motor efficiency class (IEC 60034-30-1)

COMPANY WITH
QUALITY SYSTEM
CERTIFIED BY DNV GL
= ISO 9001 =




VSP-FCR

PERFORMANCE CURVES

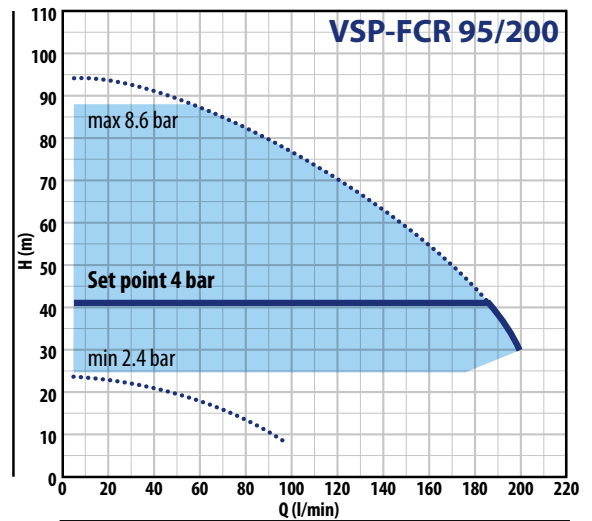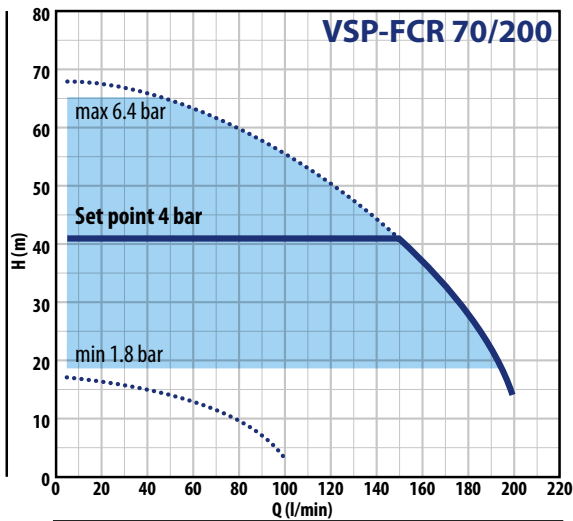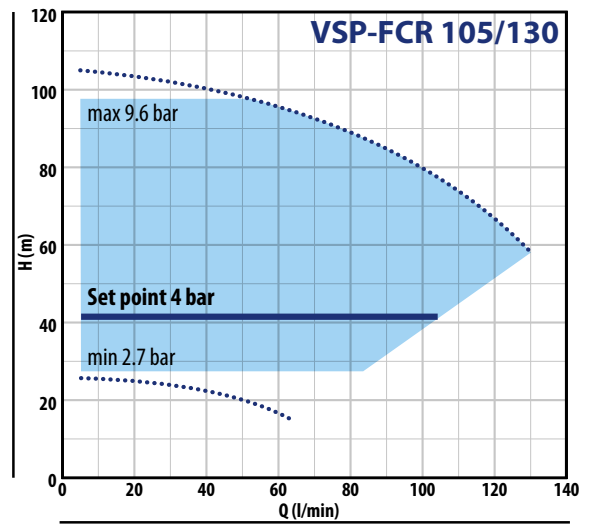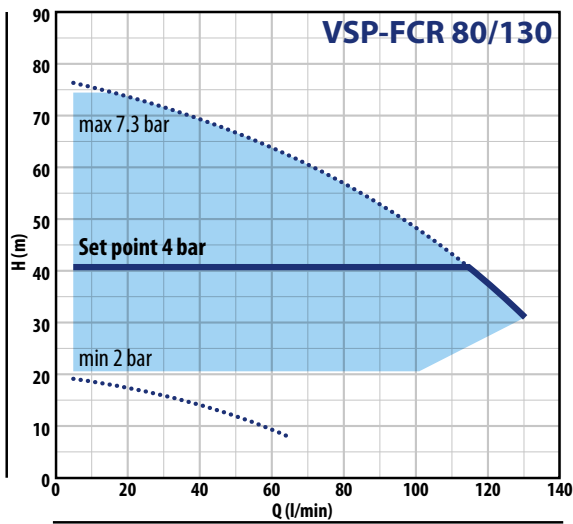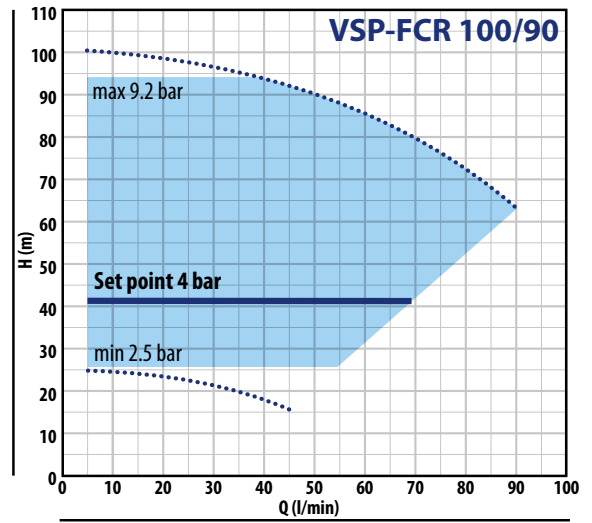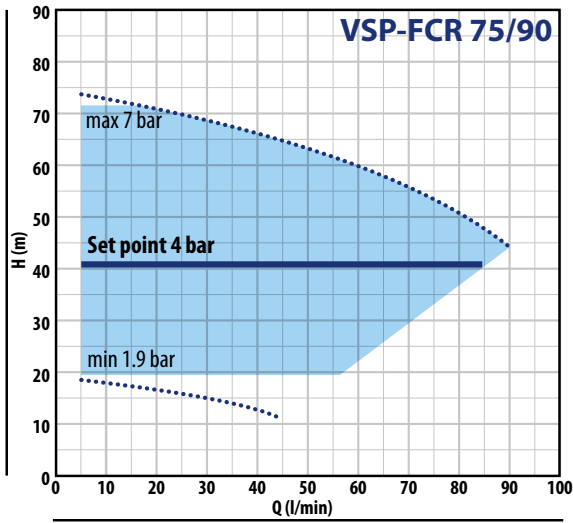

VSP-PLURIJET

PERFORMANCE RANGE

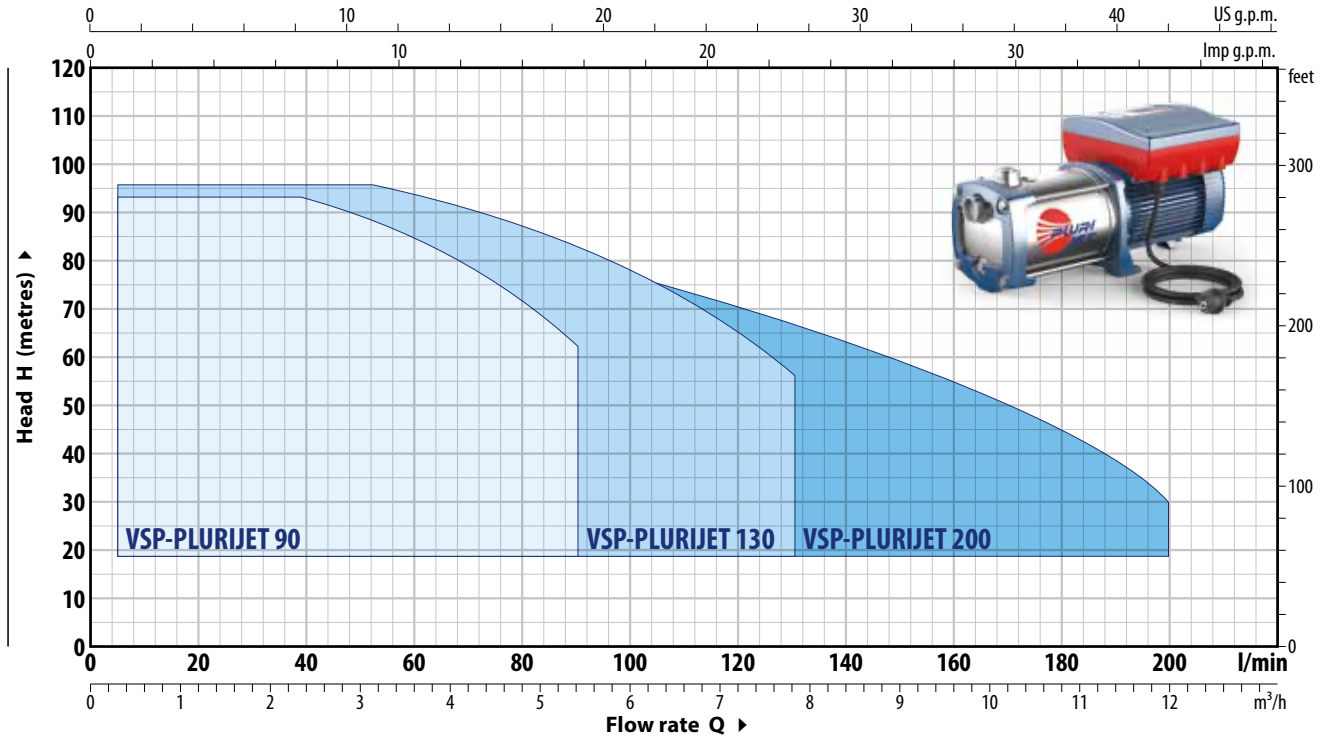

MODEL	POWER			ABSORPTION	MAX PERFORMANCE		PERFORMANCE (ADJUSTABLE SET POINT)					
	P2		▲		Q	H	Min. Set Point		Set Point Std. Setting		Max. Set Point	
SINGLE-PHASE	kW	HP		230 V			litres/min	metres	bar	l/min	bar	l/min
VSPm-PLURIJET 75/90	1.5	2	IE3	9.8 A	5 – 90	73 – 44	1.9	5 – 56	4.0	5 – 86	7.0	5 – 16
VSPm-PLURIJET 80/130	1.5	2		9.8 A	10 – 130	76 – 31	2.0	5 – 100	4.0	5 – 114	7.3	5 – 18
VSPm-PLURIJET 70/200	1.5	2		9.8 A	20 – 200	67 – 14	1.8	5 – 194	4.0	5 – 152	6.4	5 – 48

MODEL	POWER			ABSORPTION	MAX PERFORMANCE		PERFORMANCE (ADJUSTABLE SET POINT)					
	P2		▲		Q	H	Min. Set Point		Set Point Std. Setting		Max. Set Point	
THREE-PHASE	kW	HP		400 V			litres/min	metres	bar	l/min	bar	l/min
VSP-PLURIJET 75/90	1.5	2	IE3	3.6 A	5 – 90	73 – 44	1.9	5 – 56	4.0	5 – 86	7.0	5 – 16
VSP-PLURIJET 100/90	2.2	3		4.9 A	5 – 90	100 – 63	2.5	5 – 54	4.0	5 – 69	9.2	5 – 40
VSP-PLURIJET 80/130	1.5	2		3.6 A	10 – 130	76 – 31	2.0	5 – 100	4.0	5 – 114	7.3	5 – 18
VSP-PLURIJET 105/130	2.2	3		4.9 A	10 – 130	104 – 58	2.7	5 – 85	4.0	5 – 105	9.6	5 – 46
VSP-PLURIJET 70/200	1.5	2		3.6 A	20 – 200	67 – 14	1.8	5 – 194	4.0	5 – 152	6.4	5 – 48
VSP-PLURIJET 95/200	2.2	3		4.9 A	20 – 200	93 – 30	2.4	5 – 175	4.0	5 – 185	8.6	5 – 56







▲ Three-phase motor efficiency class (IEC 60034-30-1)

COMPANY WITH
QUALITY SYSTEM
CERTIFIED BY DNV GL
= ISO 9001 =




VSP-PLURIJET

PERFORMANCE CURVES

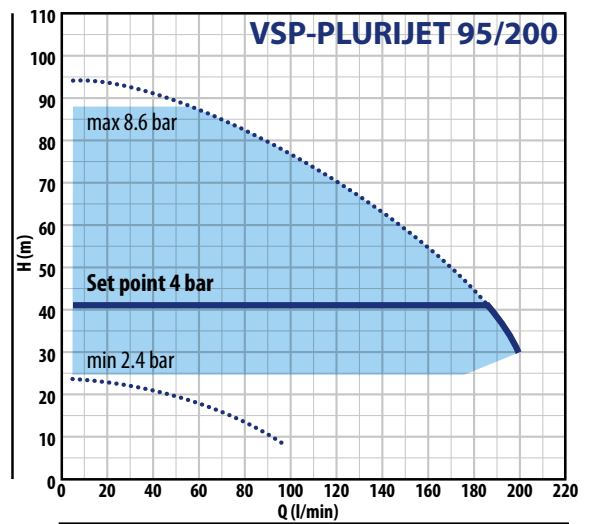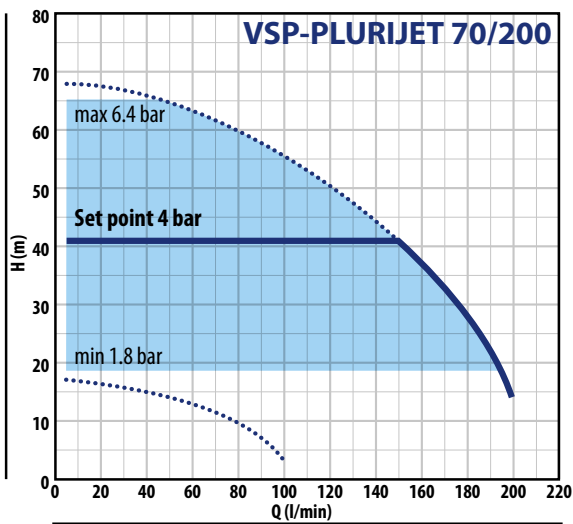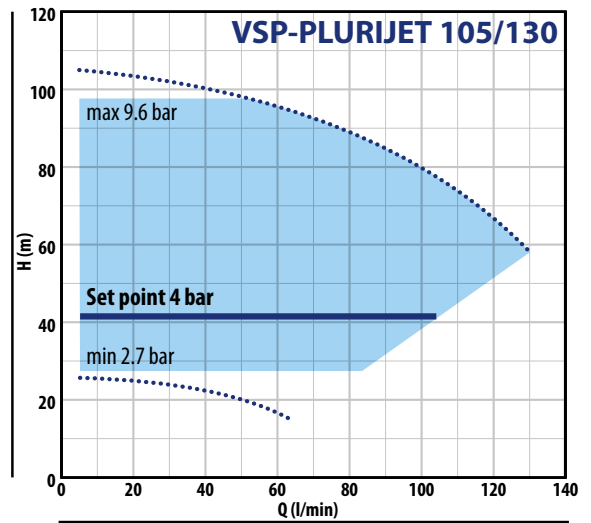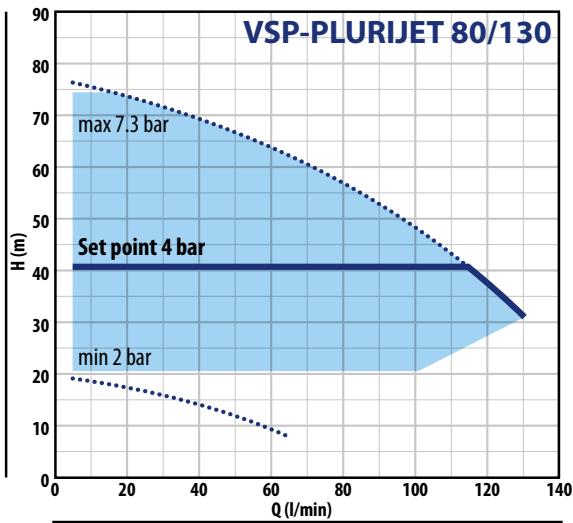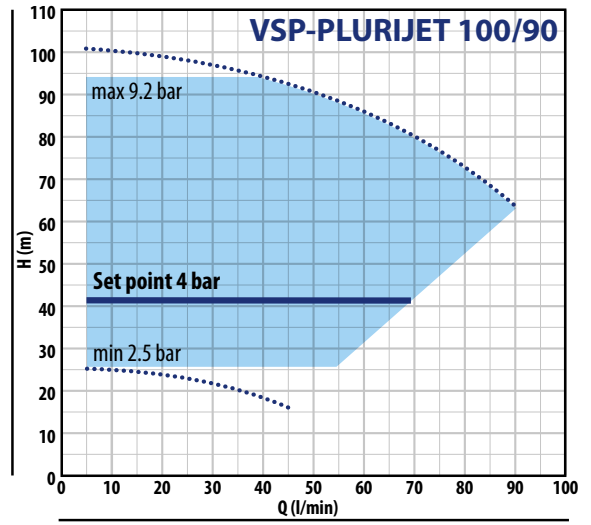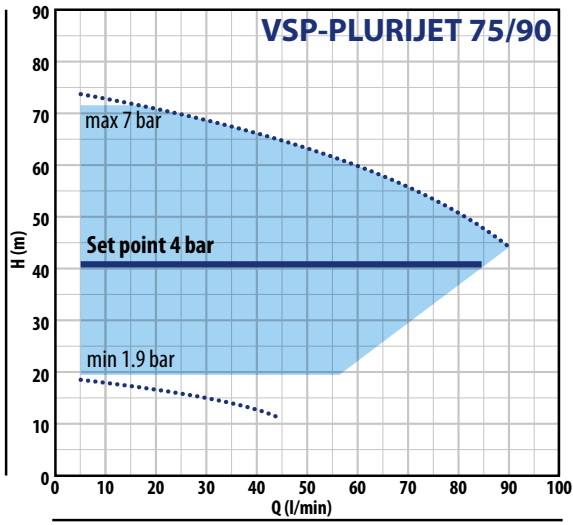

VSP-HT / VSP-HT PRO

PERFORMANCE RANGE

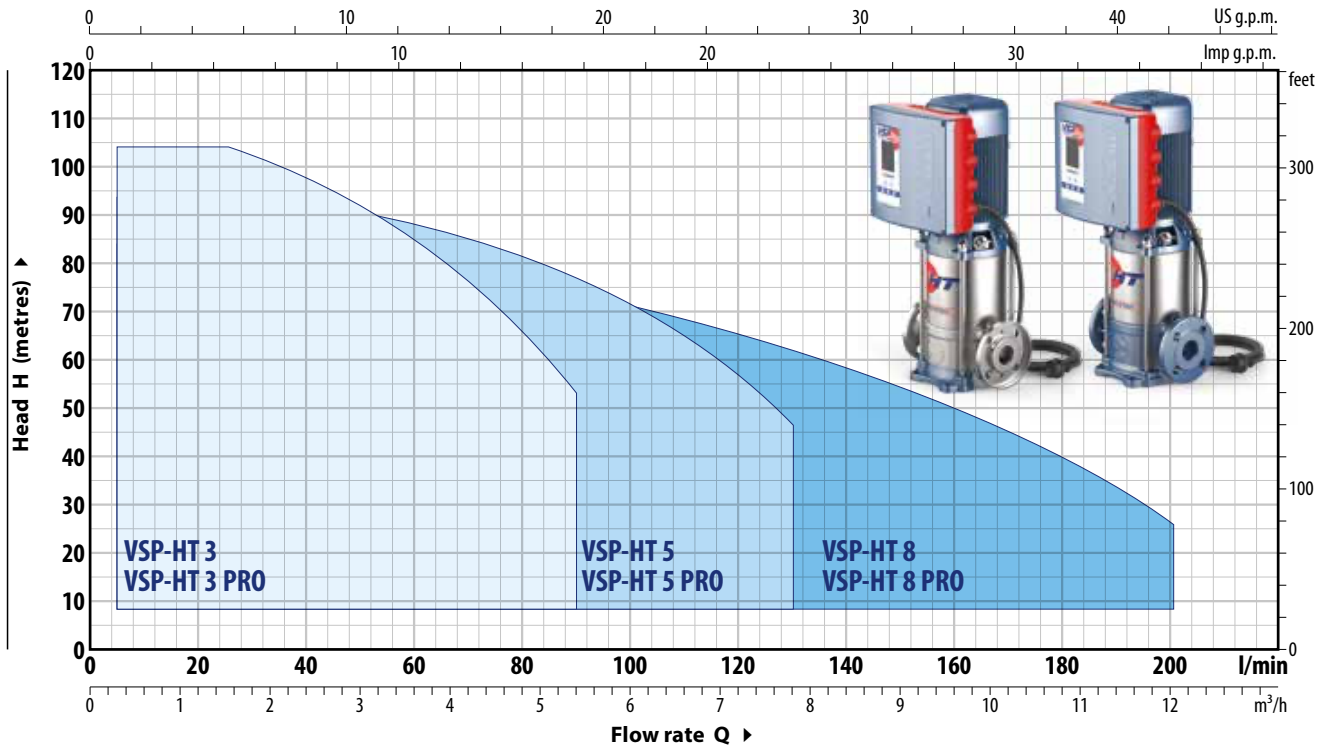







MODEL		POWER		ABSORPTION	MAX PERFORMANCE		PERFORMANCE (ADJUSTABLE SET POINT)					
		kW	HP ▲		230 V	Q	H	Min. Set Point		Set Point Std. Setting		Max. Set Point
SINGLE-PHASE					litres/min	metres	bar	l/min	bar	l/min	bar	l/min
VSPm-HT 3/4	VSPm-HT 3/4 - PRO	0.75	1	7.3 A	5 - 90	63 - 33	1.6	5 - 59	4.00	5 - 73	5.9	5 - 19
VSPm-HT 3/5	VSPm-HT 3/5 - PRO	1.1	1.5	8.5 A	5 - 90	79 - 38	2.0	5 - 62	4.00	5 - 86	7.4	5 - 22
VSPm-HT 3/6	VSPm-HT 3/6 - PRO	1.5	2	9.6 A	5 - 90	94 - 45.5	2.4	5 - 62	4.00	5 - 84	8.8	5 - 20
VSPm-HT 5/2	VSPm-HT 5/2 - PRO	0.75	1	6.8 A	5 - 130	33 - 18	0.8	5 - 83	2.00	5 - 114	3.1	5 - 22
VSPm-HT 5/3	VSPm-HT 5/3 - PRO	1.1	1.5	7.8 A	5 - 130	49 - 24	1.3	5 - 91	4.00	5 - 71	4.8	5 - 14
VSPm-HT 5/4	VSPm-HT 5/4 - PRO	1.5	2	9.6 A	5 - 130	65 - 32	1.7	5 - 90	4.00	5 - 108	6.1	5 - 26
VSPm-HT 8/3	VSPm-HT 8/3 - PRO	1.1	1.5	8.2 A	20 - 200	43 - 13	1.1	5 - 182	4.00	5 - 58	4.1	5 - 28
VSPm-HT 8/4	VSPm-HT 8/4 - PRO	1.5	2	9.8 A	20 - 200	58 - 18	1.5	5 - 180	4.00	5 - 128	5.4	5 - 48

MODEL		POWER		ABSORPTION	MAX PERFORMANCE		PERFORMANCE (ADJUSTABLE SET POINT)					
		kW	HP ▲		400 V	Q	H	Min. Set Point		Set Point Std. Setting		Max. Set Point
THREE-PHASE					litres/min	metres	bar	l/min	bar	l/min	bar	l/min
VSP-HT 3/4	VSP-HT 3/4 - PRO	0.75	1	4.2 A	5 - 90	63 - 33	1.6	5 - 59	4.00	5 - 73	5.9	5 - 19
VSP-HT 3/5	VSP-HT 3/5 - PRO	1.1	1.5	4.9 A	5 - 90	79 - 38	2.0	5 - 62	4.00	5 - 86	7.4	5 - 22
VSP-HT 3/6	VSP-HT 3/6 - PRO	1.5	2	5.6 A	5 - 90	94 - 45.5	2.4	5 - 62	4.00	5 - 84	8.8	5 - 20
VSP-HT 3/7	VSP-HT 3/7 - PRO	1.8	2.5	6.7 A	5 - 90	110 - 53	2.8	5 - 62	4.00	5 - 76	10.2	5 - 25
VSP-HT 5/2	VSP-HT 5/2 - PRO	0.75	1	3.9 A	5 - 130	33 - 18	0.8	5 - 83	2.00	5 - 114	3.1	5 - 22
VSP-HT 5/3	VSP-HT 5/3 - PRO	1.1	1.5	4.5 A	5 - 130	49 - 24	1.3	5 - 91	4.00	5 - 71	4.8	5 - 14
VSP-HT 5/4	VSP-HT 5/4 - PRO	1.5	2	5.6 A	5 - 130	65 - 32	1.7	5 - 90	4.00	5 - 108	6.1	5 - 26
VSP-HT 5/5	VSP-HT 5/5 - PRO	1.8	2.5	7.0 A	5 - 130	81 - 39	2.1	5 - 91	4.00	5 - 128	7.5	5 - 42
VSP-HT 5/6	VSP-HT 5/6 - PRO	2.2	3	7.3 A	5 - 130	97 - 47	2.6	5 - 92	4.00	5 - 118	9.3	5 - 25
VSP-HT 8/3	VSP-HT 8/3 - PRO	1.1	1.5	4.7 A	20 - 200	43 - 13	1.1	5 - 182	4.00	5 - 58	4.1	5 - 28
VSP-HT 8/4	VSP-HT 8/4 - PRO	1.5	2	5.9 A	20 - 200	58 - 18	1.5	5 - 180	4.00	5 - 128	5.4	5 - 48
VSP-HT 8/5	VSP-HT 8/5 - PRO	1.8	2.5	7.0 A	20 - 200	71.5 - 21.5	1.8	5 - 181	4.00	5 - 156	6.7	5 - 44
VSP-HT 8/6	VSP-HT 8/6 - PRO	2.2	3	7.7 A	20 - 200	85.5 - 26	2.3	5 - 186	4.00	5 - 179	8.2	5 - 32

▲ Three-phase motor efficiency class (IEC 60034-30-1)








VSP-HT / VSP-HT PRO

PERFORMANCE CURVES

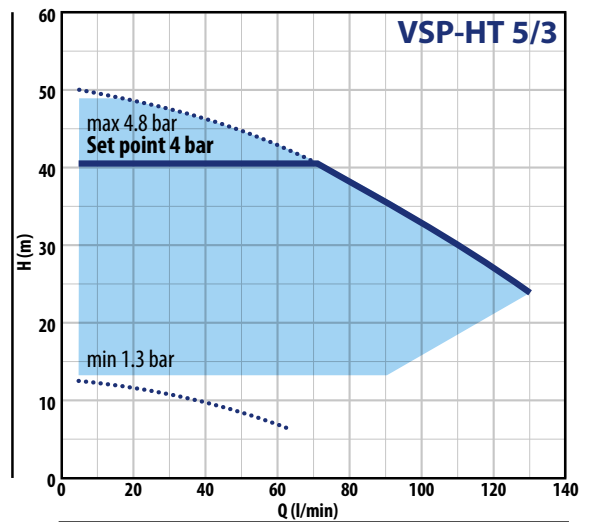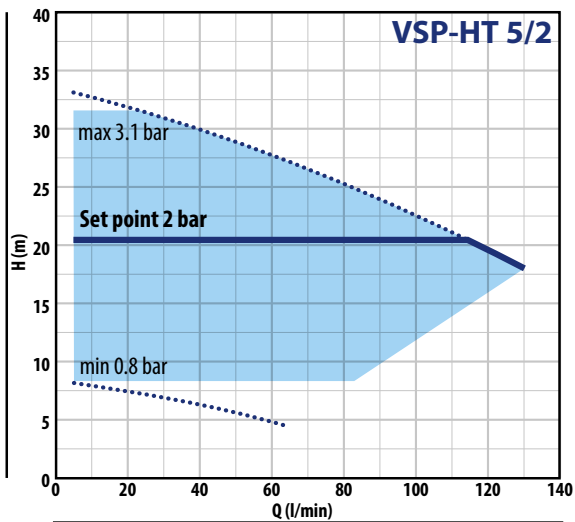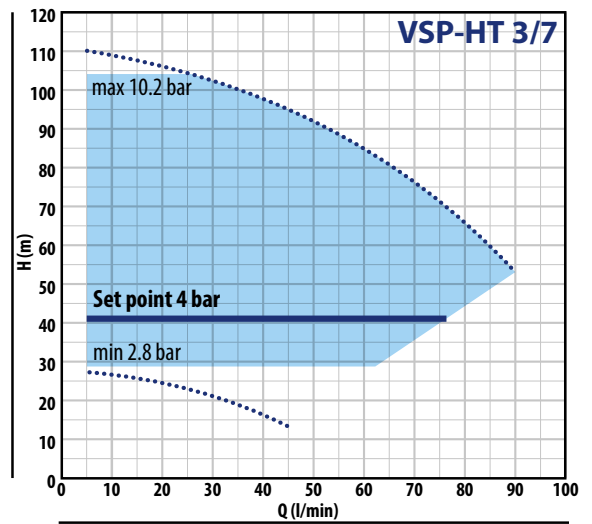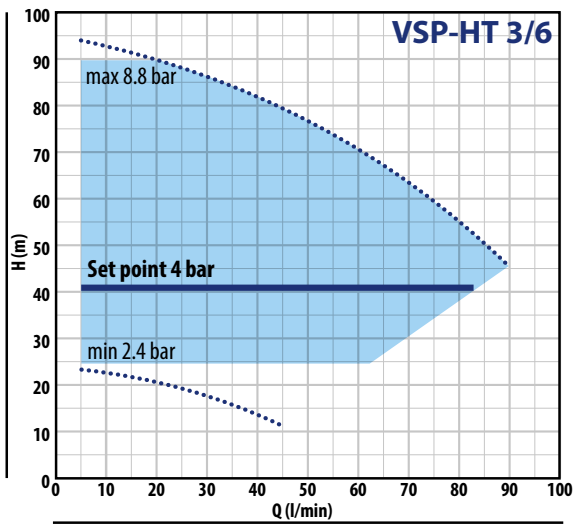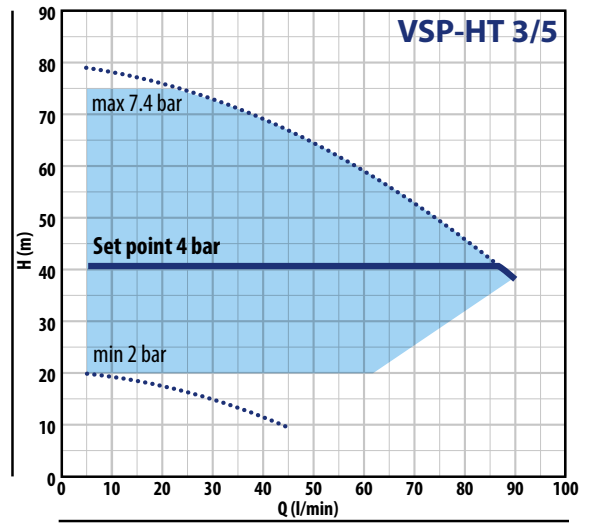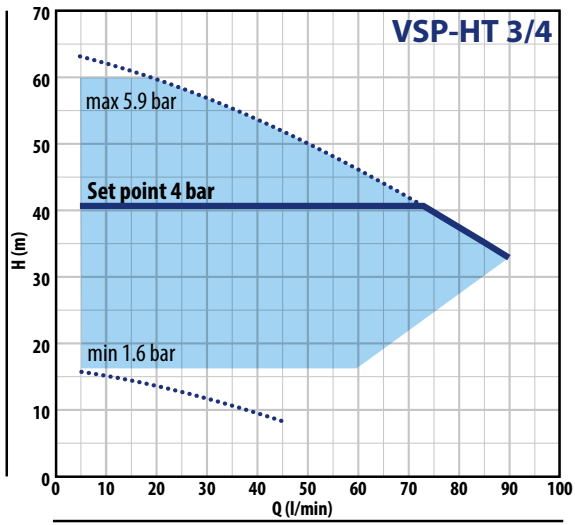


VSP-HT / VSP-HT PRO

PERFORMANCE CURVES

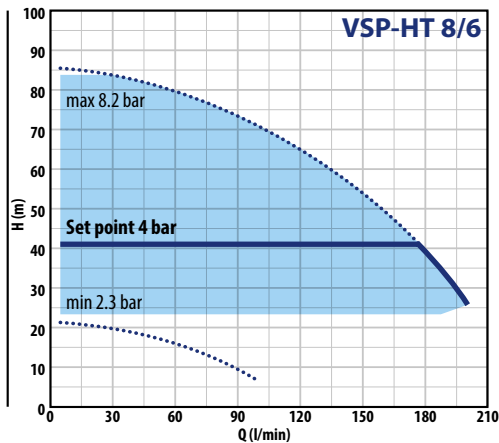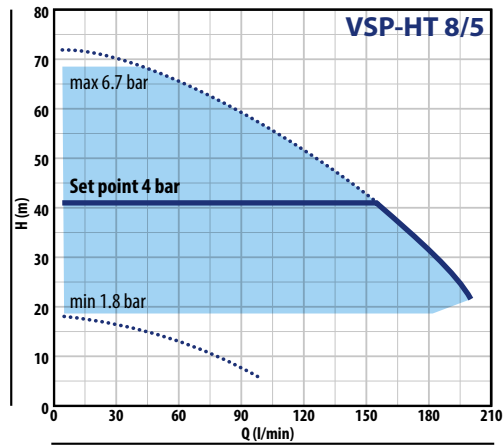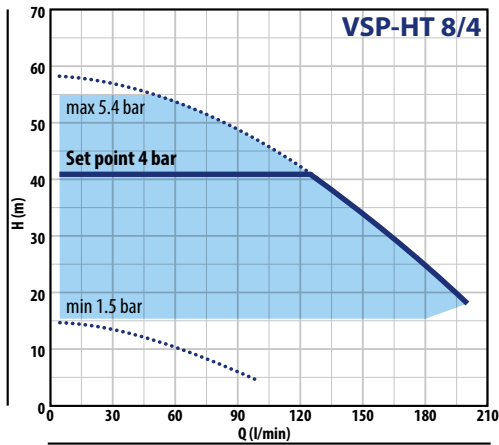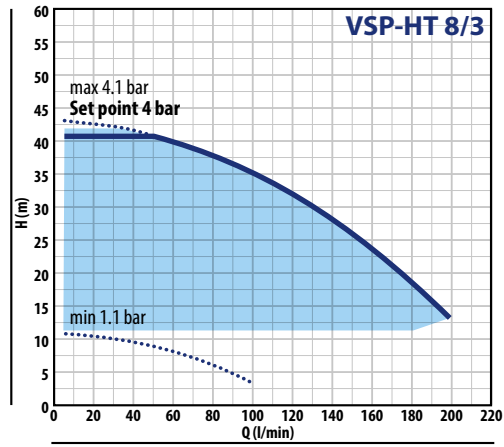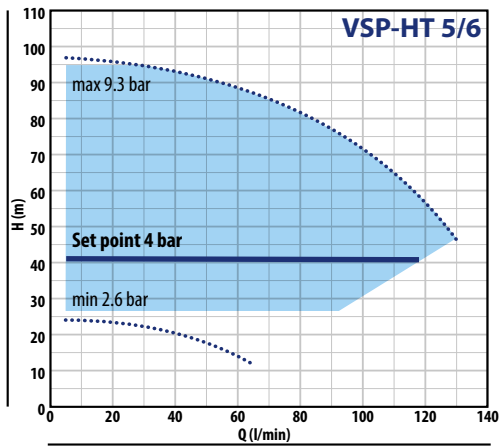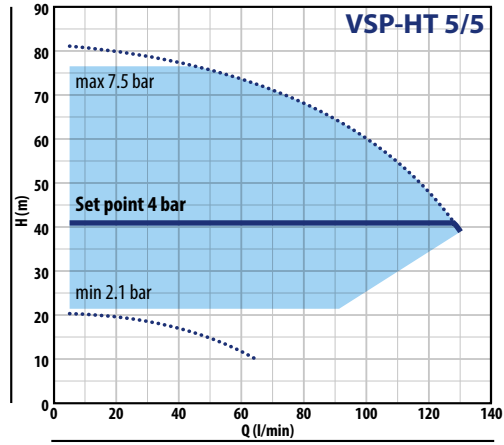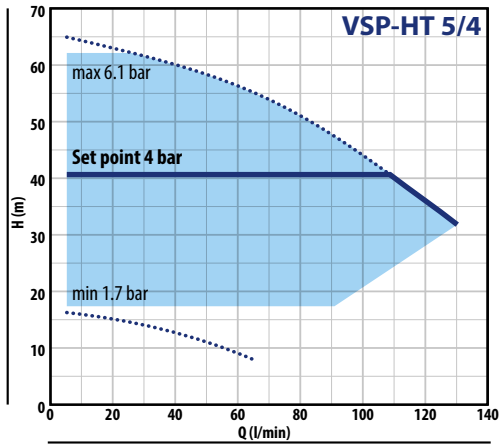

VSP-MK

PERFORMANCE CURVES

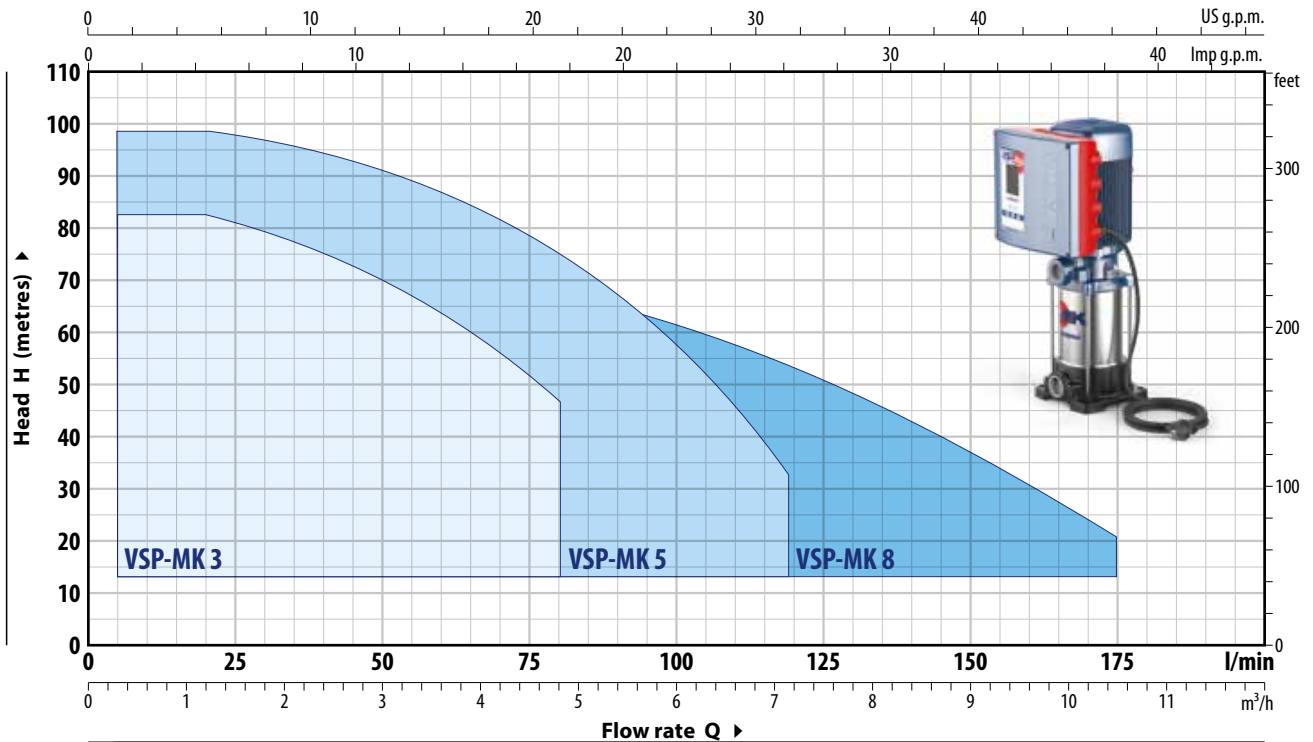

MODEL	POWER			ABSORPTION	MAX PERFORMANCE		PERFORMANCE (ADJUSTABLE SET POINT)					
	P2		▲		Q	H	Min. Set Point		Set Point Std. Setting		Max. Set Point	
SINGLE-PHASE	kW	HP		230 V			litres/min	metres	bar	l/min	bar	l/min
VSPm-MK 3/3	0.75	1	IE3	6.0 A	10 – 80	52 – 29	1.4	5 – 52	4.00	5 – 52	5.0	5 – 14
VSPm-MK 3/5	1.1	1.5		7.3 A	10 – 80	85 – 48	2.3	5 – 52	4.00	5 – 72	8.3	5 – 13
VSPm-MK 3/6	1.5	2		8.5 A	10 – 80	101 – 56	2.7	5 – 53	4.00	5 – 65	9.7	5 – 19
VSPm-MK 5/4	0.75	1		6.0 A	20 – 120	55 – 20	1.5	5 – 101	4.00	5 – 82	5.3	5 – 26
VSPm-MK 5/5	1.1	1.5		6.6 A	20 – 120	69 – 21.5	1.8	5 – 108	4.00	5 – 99	6.7	5 – 13
VSPm-MK 5/7	1.5	2		8.5 A	20 – 120	95 – 30	2.6	5 – 109	4.00	5 – 111	9.3	5 – 16
VSPm-MK 8/4	1.1	1.5		7.3 A	40 – 180	53 – 12	1.4	5 – 175	4.00	5 – 115	5.2	5 – 30
VSPm-MK 8/5	1.5	2		8.5 A	40 – 180	68 – 15.5	1.8	5 – 175	4.00	5 – 138	6.6	5 – 45

MODEL	POWER			ABSORPTION	MAX PERFORMANCE		PERFORMANCE (ADJUSTABLE SET POINT)					
	P2		▲		Q	H	Min. Set Point		Set Point Std. Setting		Max. Set Point	
THREE-PHASE	kW	HP		400 V			litres/min	metres	bar	l/min	bar	l/min
VSP-MK 3/3	0.75	1	IE3	3.5 A	10 – 80	52 – 29	1.4	5 – 52	4.00	5 – 52	5.0	5 – 14
VSP-MK 3/5	1.1	1.5		4.2 A	10 – 80	85 – 48	2.3	5 – 52	4.00	5 – 72	8.3	5 – 13
VSP-MK 3/6	1.5	2		4.9 A	10 – 80	101 – 56	2.7	5 – 53	4.00	5 – 65	9.7	5 – 19
VSP-MK 5/4	0.75	1		3.5 A	20 – 120	55 – 20	1.5	5 – 101	4.00	5 – 82	5.3	5 – 26
VSP-MK 5/5	1.1	1.5		3.8 A	20 – 120	69 – 21.5	1.8	5 – 108	4.00	5 – 99	6.7	5 – 13
VSP-MK 5/7	1.5	2		4.9 A	20 – 120	95 – 30	2.6	5 – 109	4.00	5 – 111	9.3	5 – 16
VSP-MK 5/8	2.2	3		6.0 A	20 – 120	108 – 34	2.9	5 – 109	4.00	5 – 115	10.6	5 – 14
VSP-MK 8/4	1.1	1.5		4.2 A	40 – 180	53 – 12	1.4	5 – 175	4.00	5 – 115	5.2	5 – 30
VSP-MK 8/5	1.5	2		4.9 A	40 – 180	68 – 15.5	1.8	5 – 175	4.00	5 – 138	6.6	5 – 45
VSP-MK 8/6	2.2	3	6.3 A	40 – 180	81 – 18.5	2.2	5 – 175	4.00	5 – 149	8.0	5 – 22	







▲ Three-phase motor efficiency class (IEC 60034-30-1)

COMPANY WITH
QUALITY SYSTEM
CERTIFIED BY DNV GL
= ISO 9001 =







VSP-MK

PERFORMANCE CURVES

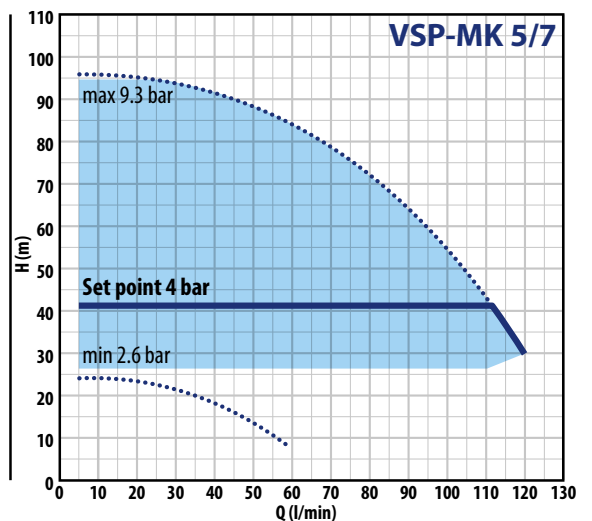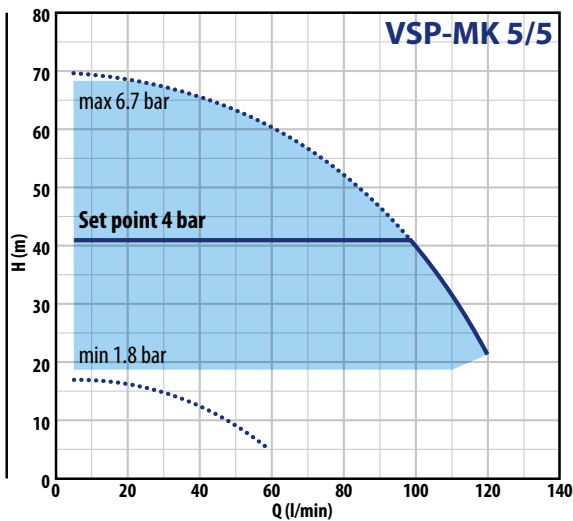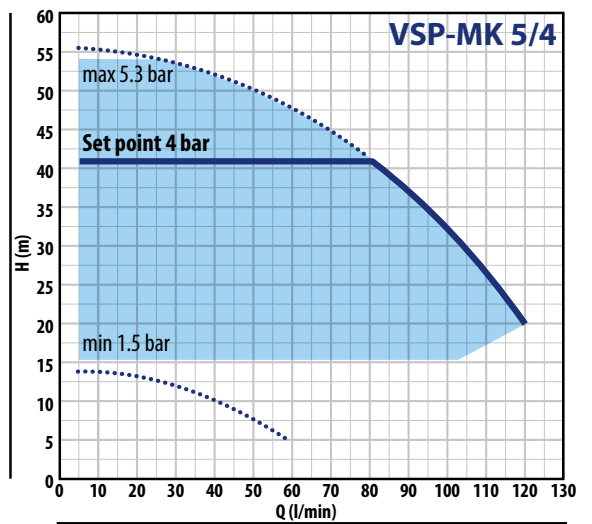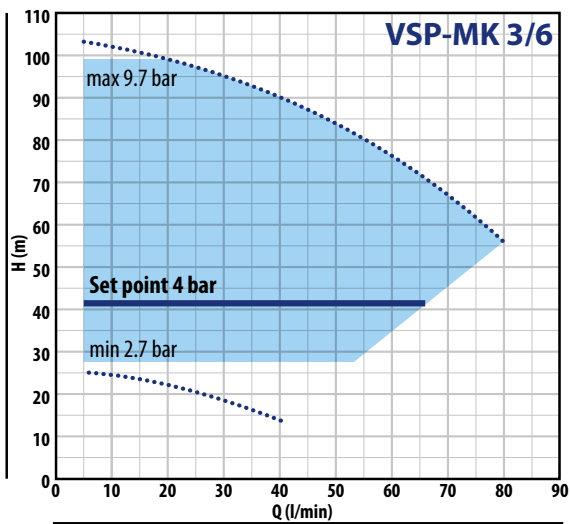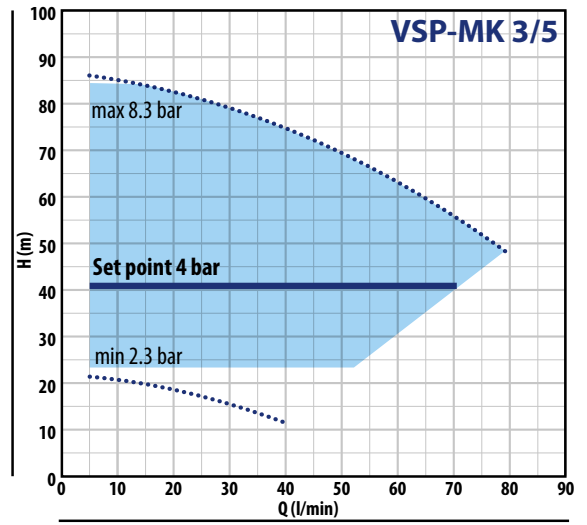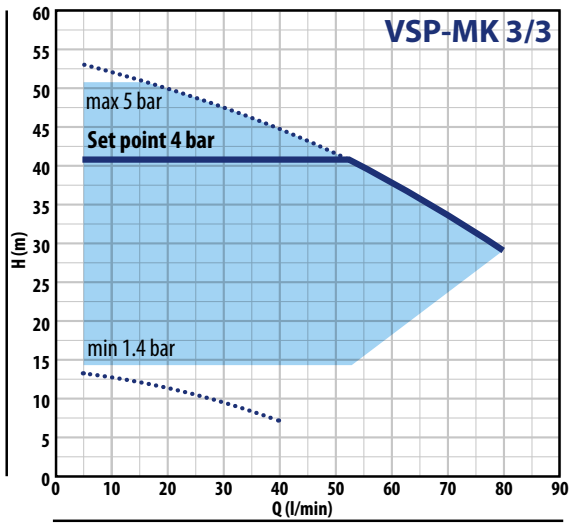


VSP-MK

PERFORMANCE CURVES

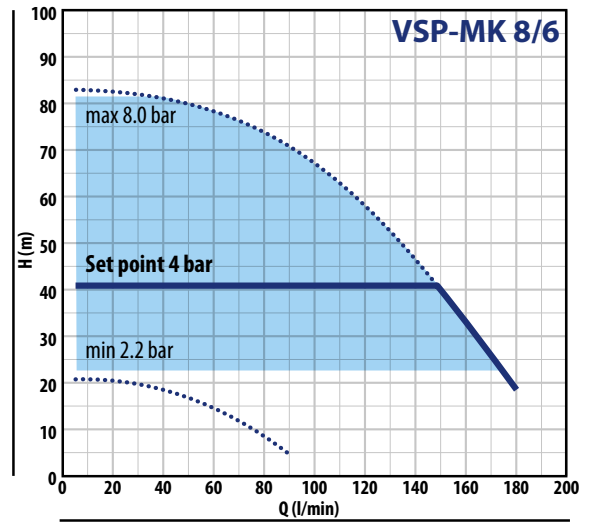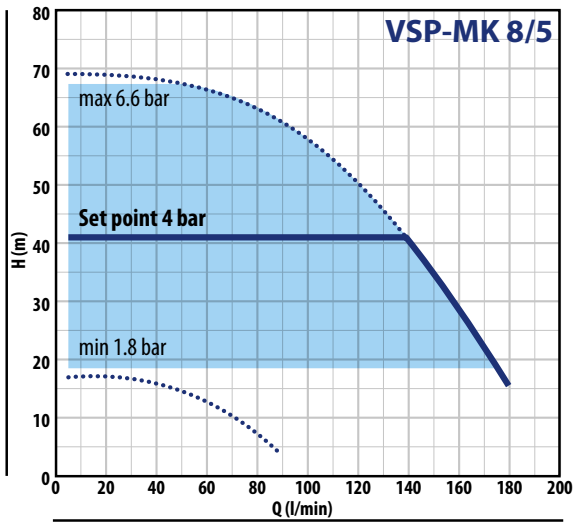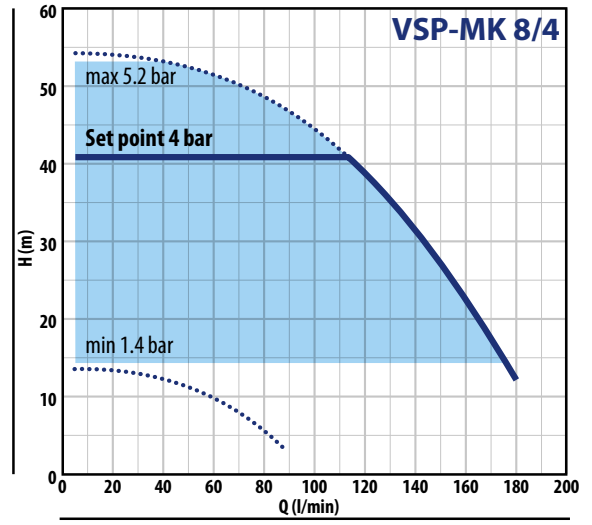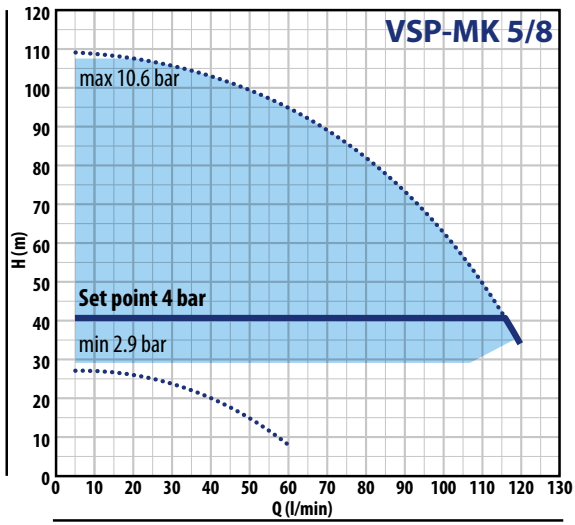


VSP-FCR/ VSP-PLURIJET

WEIGHT AND DIMENSIONS (mm)

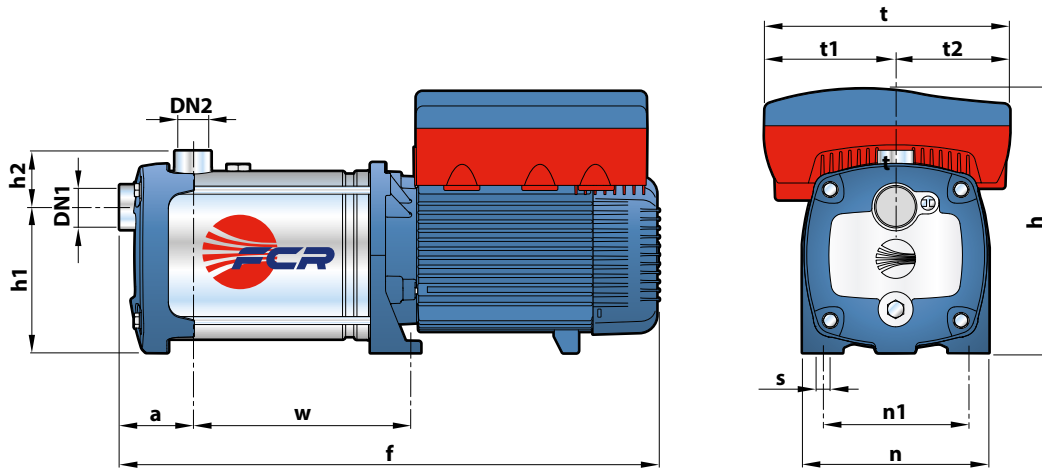


MODEL		PORTS		DIMENSIONS mm													kg	
Single-phase	Three-phase	DN1	DN2	f	a	w	h	h1	h2	t	t1	t2	n	n1	s	1~	3~	
VSPm-FCR 75/90	VSP-FCR 75/90	1 1/4"	1"	445	75	139	260	145	59	242	129	113	185	145	11	21.7	21.7	
-	VSP-FCR 100/90			471		165										-	21.9	
VSPm-FCR 80/130	VSP-FCR 80/130			445		139										21.9	21.9	
-	VSP-FCR 105/130			471		165										-	21.9	
VSPm-FCR 70/200	VSP-FCR 70/200			445		139										24.1	23.9	
-	VSP-FCR 95/200			471		165										-	24.0	

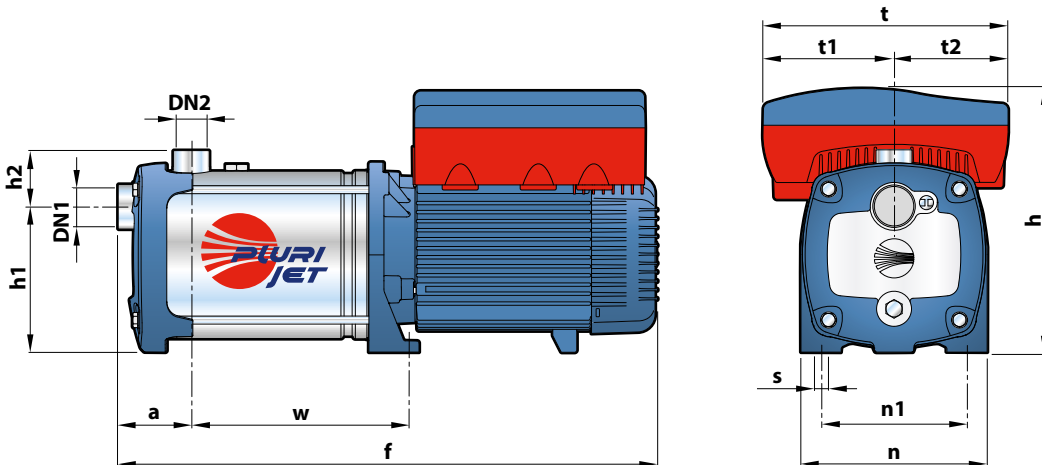

MODEL		PORTS		DIMENSIONS mm													kg	
Single-phase	Three-phase	DN1	DN2	f	a	w	h	h1	h2	t	t1	t2	n	n1	s	1~	3~	
VSPm-PLURIJET 75/90	VSP-PLURIJET 75/90	1 1/4"	1"	497	75	191	260	145	59	242	129	113	185	145	11	21.7	21.7	
-	VSP-PLURIJET 100/90			523		217										-	23.9	
VSPm-PLURIJET 80/130	VSP-PLURIJET 80/130			497		191										21.9	21.9	
-	VSP-PLURIJET 105/130			523		217										-	24.1	
VSPm-PLURIJET 70/200	VSP-PLURIJET 70/200			497		191										21.9	21.9	
-	VSP-PLURIJET 95/200			523		217										-	24.0	

VSP-HT


WEIGHT AND DIMENSIONS (mm)

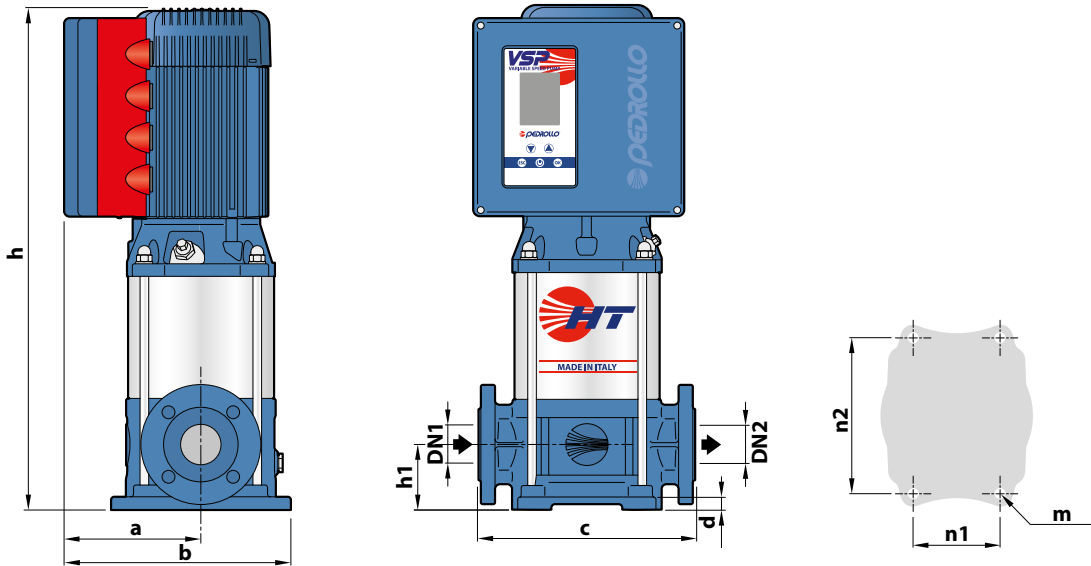

MODEL		PORTS		DIMENSIONS mm									kg	
Single-phase	Three-phase	DN1	DN2	a	b	c	d	h	h1	n1	n2	m	1~	3~
VSPm-HT 3/4	VSP-HT 3/4	1"	1"					509					37.3	36.8
VSPm-HT 3/5	VSP-HT 3/5							535					37.5	37.0
VSPm-HT 3/6	VSP-HT 3/6							561					38.2	39.1
-	VSP-HT 3/7							607					-	43.2
VSPm-HT 5/2	VSP-HT 5/2	1 1/4"	1 1/4"	164	269	250	15	457	75	100	180	Ø 13	36.3	36.3
VSPm-HT 5/3	VSP-HT 5/3							483	36.5				36.5	
VSPm-HT 5/4	VSP-HT 5/4							509	38.4				38.5	
-	VSP-HT 5/5							555	-				42.1	
-	VSP-HT 5/6	581	-	43.2										
VSPm-HT 8/3	VSP-HT 8/3	1 1/2"	1 1/2"			280		488	80				37.9	37.9
VSPm-HT 8/4	VSP-HT 8/4							514					39.8	39.9
-	VSP-HT 8/5							560					-	43.4
-	VSP-HT 8/6							586					-	44.2


FLANGES

MODEL	DN FLANGES mm	F mm	D mm	K mm	HOLES	
					No.	Ø mm
VSP-HT 3	25	1"	115	85	4	14
VSP-HT 5	32	1 1/4"	140	100		18
VSP-HT 8	40	1 1/2"	150	110		18




COUNTERFLANGES

MODEL	DN FLANGES mm	F mm	D mm	K mm	HOLES	
					No.	Ø mm
VSP-HT 3	25	1"	115	85	4	14
VSP-HT 5	32	1 1/4"	140	100		18
VSP-HT 8	40	1 1/2"	150	110		18




VSP-HT PRO

WEIGHT AND DIMENSIONS (mm)

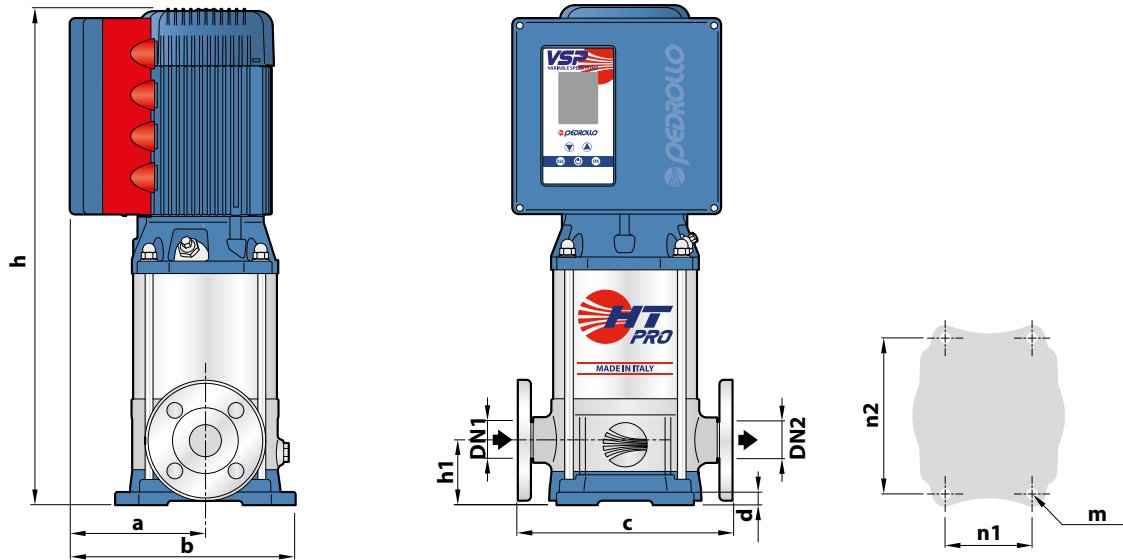


MODEL		PORTS		DIMENSIONS mm									kg	
Single-phase	Three-phase	DN1	DN2	a	b	c	d	h	h1	n1	n2	m	1~	3~
VSPm-HT 3/4 PRO	VSP-HT 3/4 PRO	1"	1"					509	75				35.3	34.8
VSPm-HT 3/5 PRO	VSP-HT 3/5 PRO							535					35.5	35.0
VSPm-HT 3/6 PRO	VSP-HT 3/6 PRO							561					36.2	37.1
-	VSP-HT 3/7 PRO							607					-	41.2
VSPm-HT 5/2 PRO	VSP-HT 5/2 PRO	1 1/4"	1 1/4"	164	269	212	15	457	80	100	180	Ø 13	33.2	33.2
VSPm-HT 5/3 PRO	VSP-HT 5/3 PRO							483					33.4	33.4
VSPm-HT 5/4 PRO	VSP-HT 5/4 PRO							509					35.3	35.4
-	VSP-HT 5/5 PRO							555					-	39.1
-	VSP-HT 5/6 PRO	581	-	40.1										
VSPm-HT 8/3 PRO	VSP-HT 8/3 PRO	1 1/2"	1 1/2"			240		488	80				33.9	33.9
VSPm-HT 8/4 PRO	VSP-HT 8/4 PRO							514					35.8	35.9
-	VSP-HT 8/5 PRO							560					-	39.4
-	VSP-HT 8/6 PRO							586					-	40.2

MODEL	DN FLANGES mm	D mm	K mm	HOLES	
				No.	Ø mm
VSP-HT 3 - PRO	25	115	85	4	14
VSP-HT 5 - PRO	32	140	100		18
VSP-HT 8 - PRO	40	150	110		



VSP-MK

WEIGHT AND DIMENSIONS (mm)

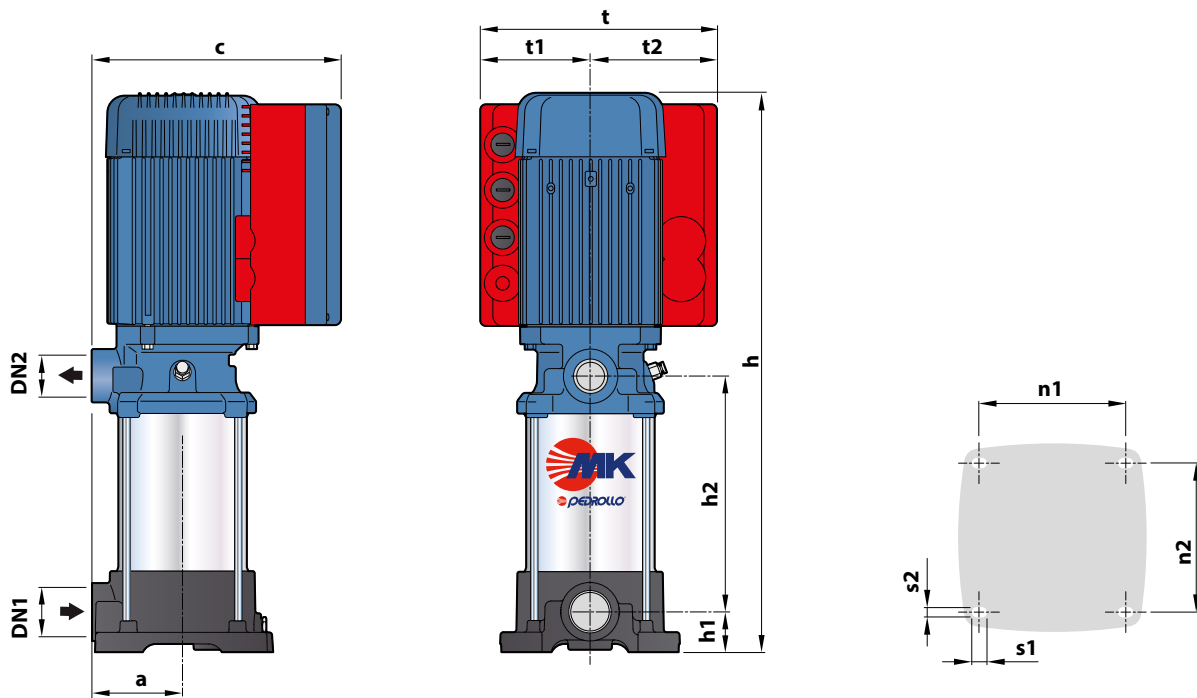

MODEL		PORTS		No. STAGES	DIMENSIONS mm												kg	
Single-phase	Three-phase	DN1	DN2		a	c	h	h1	h2	t	t1	t2	n1	n2	s1	s2	1~	3~
VSPm-MK 3/3	VSP-MK 3/3	1 1/4"	1"	3	93	255	447	132	242	113	129	143	146	14.5	10	23.3	23.3	
VSPm-MK 3/5	VSP-MK 3/5			5			501	186								25.5	25.5	
VSPm-MK 3/6	VSP-MK 3/6			6			528	213								27.3	27.3	
VSPm-MK 5/4	VSP-MK 5/4			4			474	159								23.8	23.8	
VSPm-MK 5/5	VSP-MK 5/5			5			501	186								25.2	25.2	
VSPm-MK 5/7	VSP-MK 5/7			7			555	240								28.3	28.3	
-	VSP-MK 5/8			8			602	267								-	28.6	
VSPm-MK 8/4	VSP-MK 8/4			4			474	159								26.6	26.6	
VSPm-MK 8/5	VSP-MK 8/5			5			501	186								27.0	27.0	
-	VSP-MK 8/6			6			548	213								-	29.4	

The data contained in this publication are not to be considered binding.
 Pedrollo S.p.A. reserves the right to make any changes it deems appropriate to improve its production.

Pedrollo S.p.A.
 Via Enrico Fermi, 7 - 37047 San Bonifacio (Verona) Italy
 tel. +39 045 6136311 - fax +39 045 7614663
 vendite@pedrollo.com - sales@pedrollo.com - www.pedrollo.com

MADE IN ITALY

<https://szivattyuk.hu>

DPL90088UK_00